


EASY FEEDER - EF

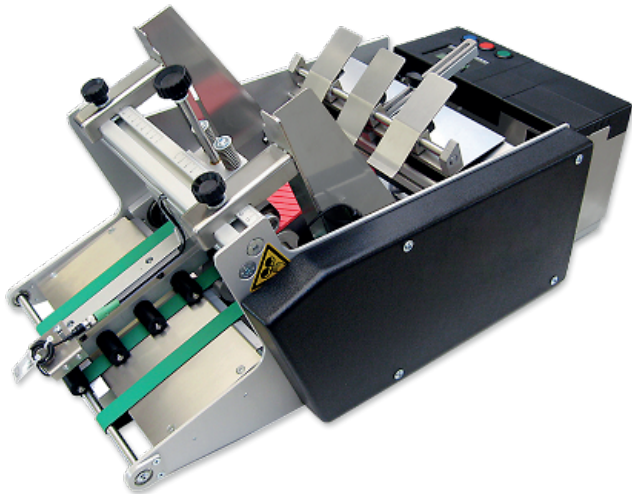

FEAUTRES

- Feeding width 235 mm standard
- Modular, compact industrial machine design
- Simple, clear and user-friendly
- Single product feeding
- Easy feeding of the products
- Central air gap adjustment from 0.1 up to 5 mm
- Missing sheet detection by product run-time monitoring
- Min. stack monitoring in the magazine
- Product magazine for loading is easily accessible
- Individual adjustable stack support
- Infinitely adjustable feeding speed up to 40 m/min
- Drive actuated via DC motor
- Ruggedly designed machine frame, anodised aluminium, non-corrosive steel
- Low noise level
- Specification according to EC machinery directive, CE-conformity

CONTROL



- 4-line LC-Display, with parameter selection by buttons
- User guidance and status display in different languages (German, English Standard, Other languages selectable)
- Etana Microprocessor control
- Protection type IP 40
- PLC-Interface, 15 pins
- Self-control functions with diagnosis information
- Fault message indication by way of display
- Preset of the start pulse (high/low)
- Product length setting for missing sheet and doublesheet control
- Product stop position adjustable
- Electrical and electronic connectors of plug-in type, protected inside the housing

OPTIONS

- Piece counter preselection with SET / ACT comparison
- selectable operation mode cycled or continuous
- Signal lamp

TECHNICAL DATA

Formats: (special formats possible)	min. 80 x 60 mm, max. 300 x 235 mm (short side forward)
Belt speed / feeding performance (depending on product):	40 m/min. (continuous) / up to 60 cycles/min. (A5, cycled)
Product passage:	min. 0.1 mm, max 5 mm, paper quality 80 g/m ²
Magazine loading: (depending on product)	Standard 200 mm, DIN A4 max. 50 mm max. load
Drive:	DC-Motor, infinitely adjustable
Control:	Microprocessor control etana, PLC control, self control, error warning etc.
Supply voltage / Power input:	230 V / 50 Hz, 200 VA
Dimensions (W x D x H) / Weight:	684 x 336 x 320 mm / ca. 20 kg

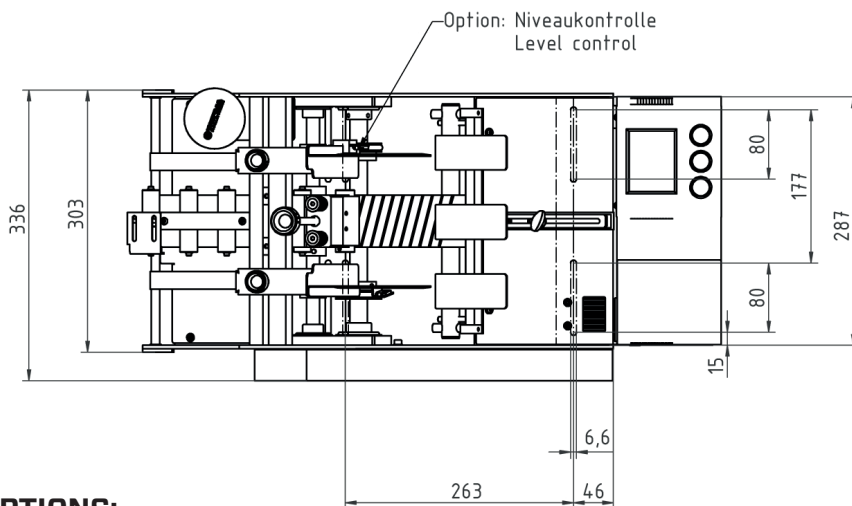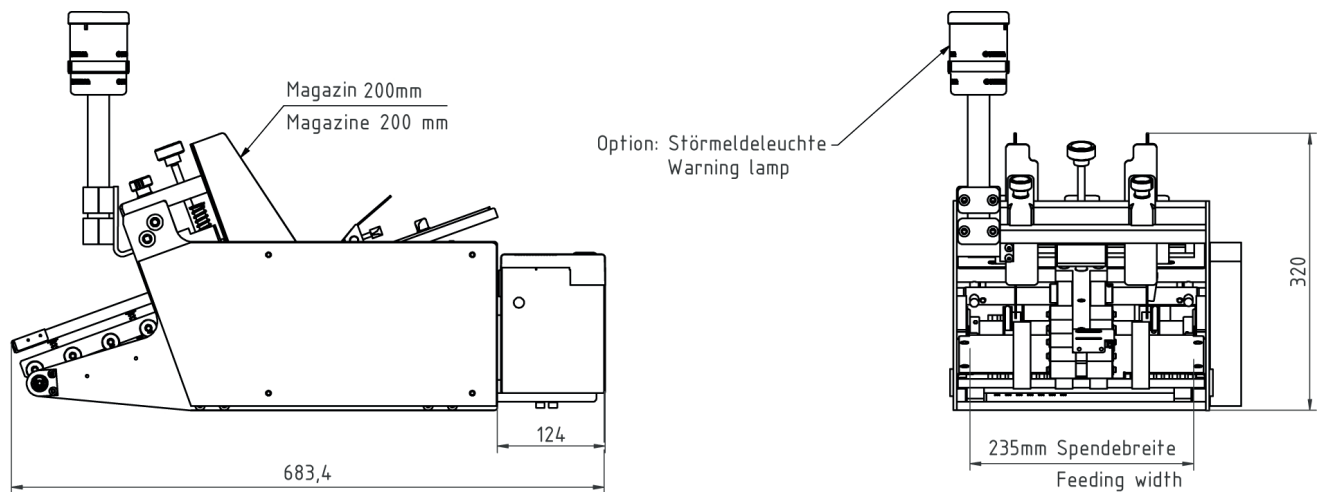

OPTIONS:

Counter function:	Preselection and daily counter
Start sensor:	for external start pulse
Pulse generator:	for setting of cycle speed
Floor stand:	Movable and vertically adjustable +/- 50 mm
Level control:	In stacking magazine or autoloader
Additional signal lamp:	For optical error display / status display